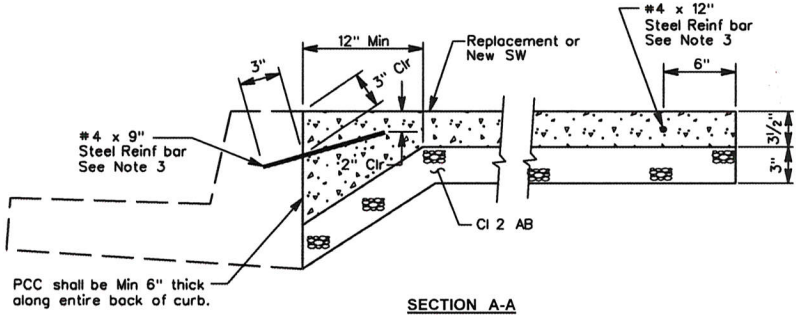

SECTION A-A

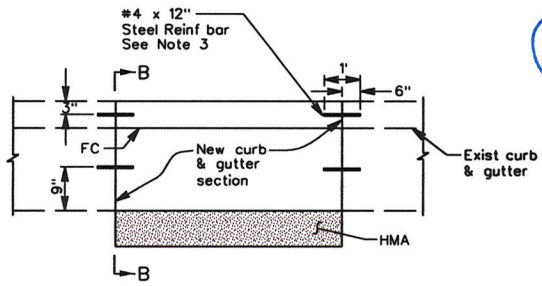

DOWELING LOCATION FOR NEW CURB CONFORMING TO EXISTING CURB

PUBLIC WORKS DIRECTOR

March 11, 2014

PLANS APPROVAL DATE

The County of Contra Costa or its officers or agents shall not be responsible for the accuracy or completeness of electronic copies of this plan sheet.

REGISTERED PROFESSIONAL ENGINEER — JULIA R BUEREN — No. 37937 — CIVIL — STATE OF CALIFORNIA

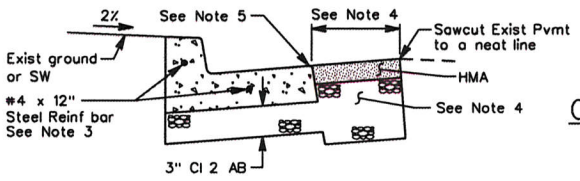

TYPE S1 CURB

OR

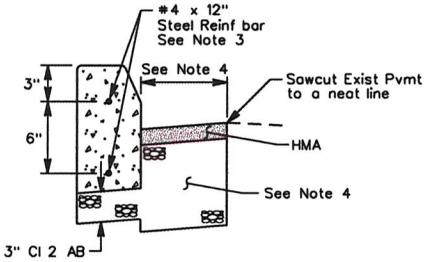

TYPE M CURB

SECTION B-B

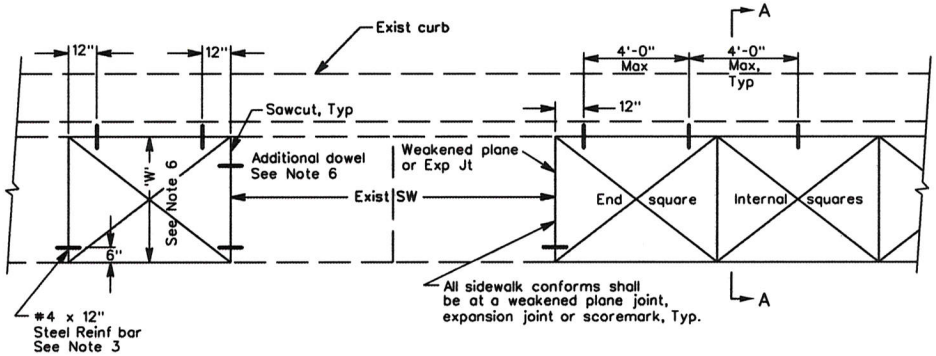

REPLACEMENT OF ONE SQUARE

REPLACEMENT OF TWO OR MORE SQUARES

LOCATIONS FOR REPLACEMENT SIDEWALK

NOTES:

1. All curb, gutter, and sidewalk shall conform to Standard Plans CA70 and CA71.
2. Concrete sidewalk removed for replacement construction shall be sawcut to a neat line at the nearest weakened plane joint, expansion joint or scoremark.
3. Dowels shall be placed in a ¾" diameter drilled hole filled with 1:1 sand cement grout.
4. When replacing existing curb on existing alignment and grade, sawcut existing pavement 6" from gutter lip (or face of curb for Type 'B' curb replacement). Remove existing HMA and base to minimum 6" depth, compact subgrade and replace with full depth HMA. If placing new curb, sawcut pavement minimum of 12" inside existing edge of pavement, EP, unless otherwise directed on project plans. New pavement structural section shall be 0.5' HMA, 0.0' AB minimum unless otherwise specified on the plans or as required by the Public Works Department.
5. Paving at the gutter lip shall conform to Detail A of Standard Plan CA70. When the street slopes away from the curb. the paving shall match the gutter lip.
6. If W>5' add additional doweling, 4' maximum spacing between dowels.

NO.	DATE	REVISION DESCRIPTION	BY

COUNTY OF CONTRA COSTA
PUBLIC WORKS DEPARTMENT
MARTINEZ, CALIFORNIA

STANDARD PLAN

DOWELING DETAILS FOR CURB AND SIDEWALK

SCALE: NO SCALE | DATE: 3/14

DRAWN BY: H. HUSSEY | PLAN NO. CA74

CHECKED BY: M. HOLLINGSWORTH

STD. PLAN CA74